


Side Gill Decal Installation, 2010 -2012 Camaro

Side Gill Decal Instructions:

1. Clean the areas that decals will be sticking to with wax and grease remover.
2. Using Autotech Decal solution, spray the gill area on the car to make wet. Peel off the entire wax paper backing on the decal. See figures 1 and 2 below.

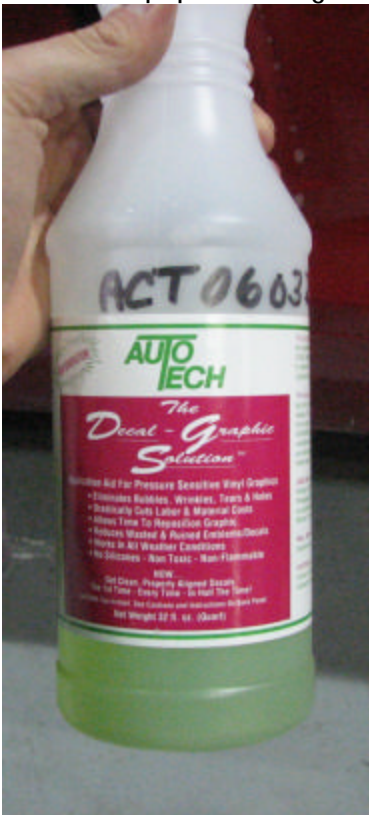

Figures 1 and 2: Decal solution and area to spray first

3. Apply the gill decal with the front edge of the decal backer lining up with the front edge of the gill where it starts on the car. Center the decal vertically. See Figure 3.



Figure 3: Lining up of front edge of decal with front edge of gill on vehicle

4. Using a squeegee, start applying pressure and fully apply the first gill. Be sure to fully seat the first gill before moving onto the second. The gills are spaced on the backer assuming you start from the front and work your way backward. Once all the gills have been seated, you may spray the backer again with decal solution. Wait about a minute before moving onto the next step. See Figures 4 and 5.

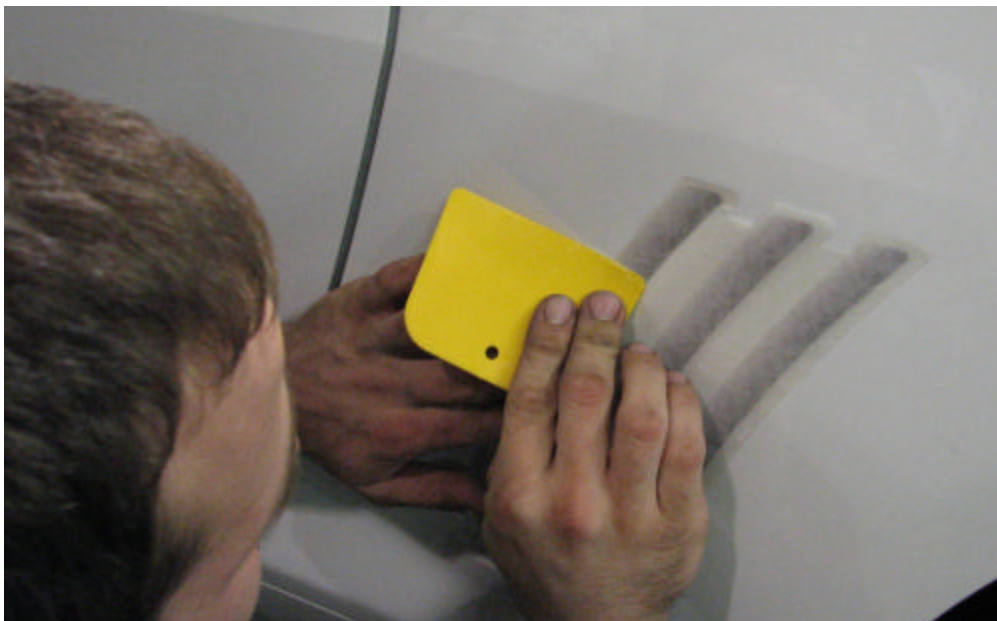


Figure 4: Starting to apply front gill



Figure 5: Spraying of backer once fully applied

5. Squeegee the gills once more to ensure they have been fully seated and begin to gently peel away the backer. You may need to squeegee the stickers themselves as you peel away the backer to ensure they do not lift from the vehicle. Once the backer is completely off, squeegee out any remaining air bubbles and dry the surface of the car.
6. The finished installation should look like figure 6.



Figure 6: Finished Decal Installation